

# SCU

## CHECKWEIGHING

Checkweighing scale in stainless steel and user-friendly for weight control. Ideal for use in damp environments.



## CHECKWEIGHER

With acoustic and luminous signal





# SCU


## CHECKWEIGHER:

## FEATURES:

- Backlight LCD display with digits of 25mm.
- Stainless steel housing.
- Stainless steel pan.
- IP67 protection.
- Capacities available: 3, 6, 15 or 30 kg.
- External calibration.
- 4 keys of functions
- 4 adjustable feet in height.
- Bubble level.
- Units: kg o g.
- Operating temperature range: -10°C + 40°C.
- Power supply with adaptor AC/DC IP68 100/240V 50/60Hz 12V 1000mA
- Internal battery 6V/4Ah rechargeable.
- Unique range / Multi range / Multi interval.
- Programmable auto switch off (programmable: from 1 to 99 minutes)




Set a high / low goal and margin parameters.

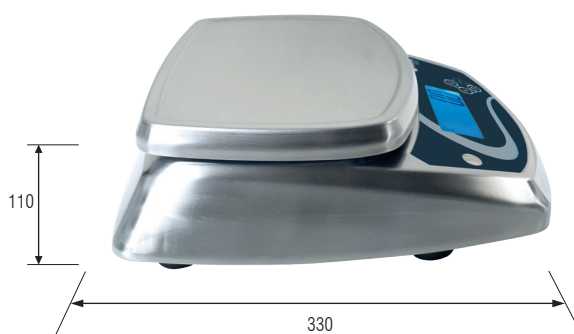

## FUNCTIONS:

- Totalization
- Piece counting
- Tare
- Gross/ Net
- Limit function: with symbol and color signal.

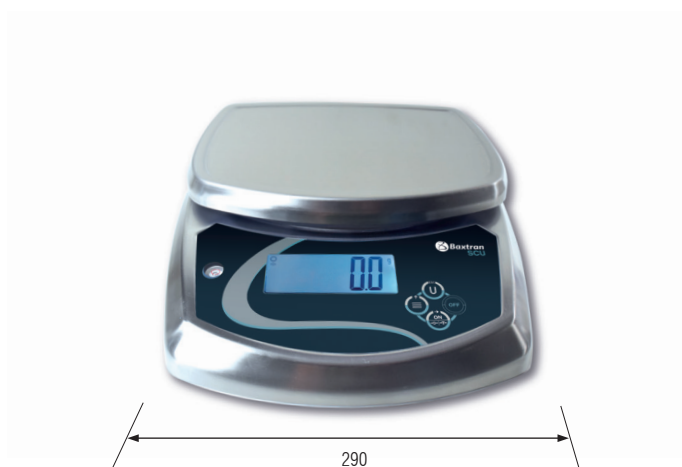

Code #	Capacity (kg)	Readout (g)	Pan dimensions (mm)	Packing dimensions (mm)	Packing weight(Kg)	ENAC	
						#Code	
261012	3	0,5	245x190	365x340x150	4,7		900033
261013	6	1	245x190	365x340x150	4,7		900001
261014	15	2	245x190	365x340x150	4,7		900001
261015	30	5	245x190	365x340x150	4,7		900001